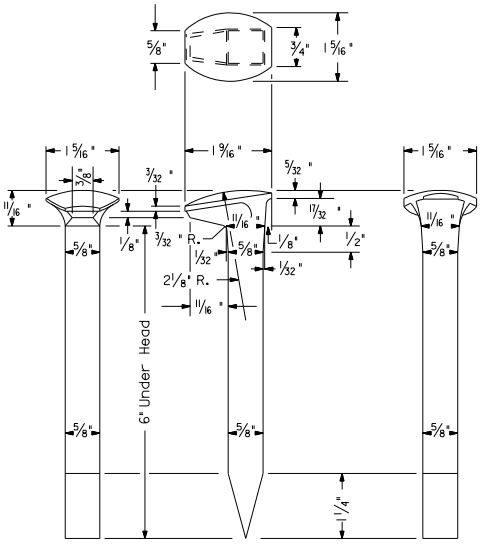

5/8" X 6" CUT TRACK SPIKE
AREMA STANDARD
640-903705

Material and workmanship to be in accordance with current AREMA manual requirements for soft steel track spikes.

Permissible shank straightness variation measured in either plane, shall not exceed 0.03I3".

Manufacturer's I.D. shall be pressed on the head of each spike while being formed.

Weight = approximately 0.83-lbs each

241 Spikes per 200-lb keg

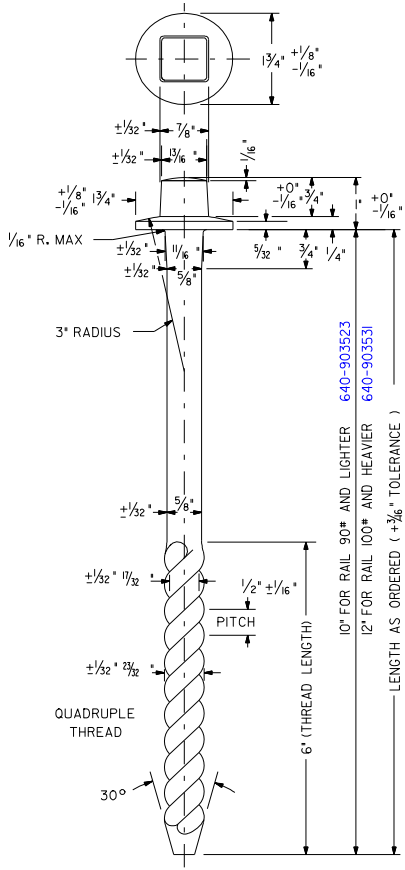

5/8" GALVANIZED DRIVE SCREW SPIKE
AREMA STANDARD
PLAN 2M-63

For fastening crossing timbers.

Drill 1/2" pilot hole in crossties.

10" Length for use in rail 90RA and lighter.
125 Spikes per 200-lb keg

12 Length for use in rail 100RE and heavier.
100 Spikes per 200-lb keg

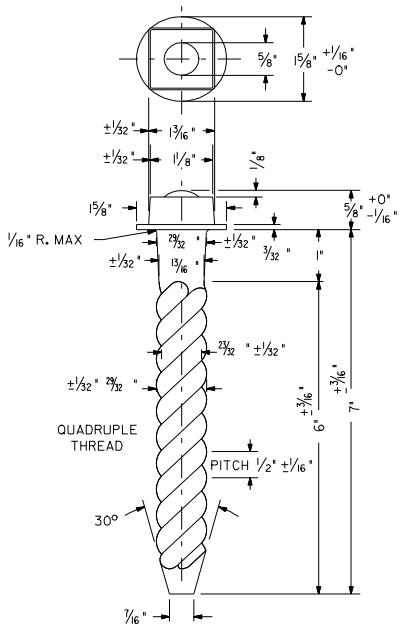

7/8" X 7" GALVANIZED DRIVE SCREW SPIKE
AREMA STANDARD
640-903565

For use where specified in turnouts.

Drill 1/2" pilot hole.

150 Spikes per 200-lb keg

NORFOLK SOUTHERN RAILWAY COMPANY

SPIKES

APRIL 1991

Atlanta, Georgia

DATE	REVISION
12-5-05	TRACK SPIKE SPECIFICATIONS