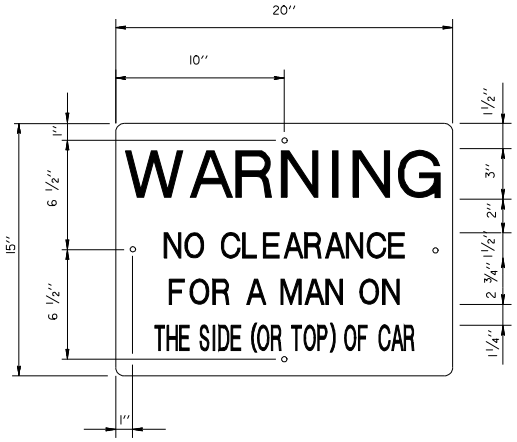

CLEARANCE SIGN (ILLINOIS)
(Black Screened Letters On White Background)
360 001699

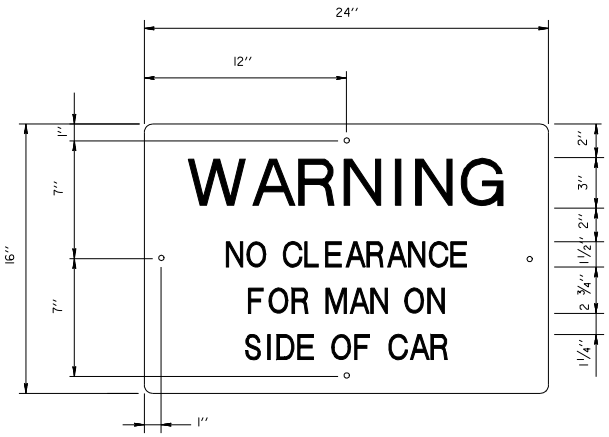

CLEARANCE SIGN (INDIANA)
(Black Screened Letters On White Background)
360 001706

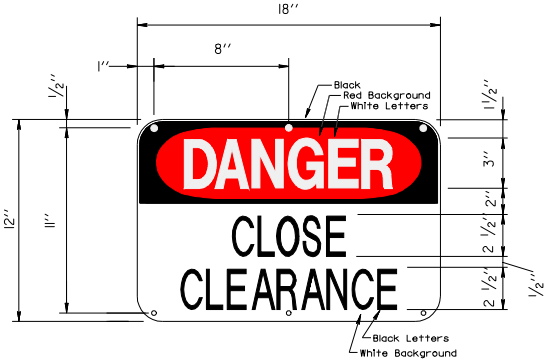

CLEARANCE SIGN (ALL OTHER STATES)
(Screened Letters On Indicated Color Background)
360 001714

NOTES:

ALL LETTERS TO BE SERIES C IN ACCORDANCE WITH CURRENT US DOT-FHWA STANDARDS.

SIGNS: 0.080 ALUMINUM.
ALL HOLES SHALL BE 3/8'' DIA. UNLESS NOTED.

FACING: ENGINEER GRADE REFLECTIVE SHEETING, COLOR AS SHOWN.

LETTERS: AS NOTED.

POSTS: STANDARD SIGN POST. SEE PLAN 6-20.

LOCATION:

SIGNS SHALL BE PLACED AT RIGHT ANGLE TO TRACK AND A MINIMUM OF 12'-0'' FROM CENTERLINE OF TRACK THAT HAS SUB-STANDARD CLEARANCE. ON TRACKS CONNECTED AT BOTH ENDS, SIGNS SHALL BE PLACED ON BOTH SIDES OF STRUCTURE, AT OR NEAR THE CLEARANCE POINT OF TURNOUT NEAREST THE STRUCTURE. IF THERE IS NO ROOM FOR POST, SIGN SHALL BE MOUNTED ON THE STRUCTURE. SIGNS ARE TO BE USED ON INDUSTRY OR LEAD TRACKS ONLY AS DIRECTED BY THE DIVISION SUPERINTENDENT.

NORFOLK SOUTHERN RAILWAY COMPANY

CLOSE CLEARANCE SIGN

JANUARY 1989
Atlanta, Georgia

REVISION	DATE